

# Veeam - Database

**This tutorial enables you to activate the monitoring of Veeam backups on your Esia server.** You need to go through the Universe central server as Unity cannot do this natively.

To enable Esia to connect to the VeeamBackup database, you need to :


- Enable SQL and Windows authentication.
- Create a user for Esia with READ-ONLY rights.
- Check the listening port

The first 2 operations listed below are performed using the “Microsoft SQL Server Management Studio” application on the machine containing the Veeam database. And the last in the “Sql Server Configuration Manager” application.

## SQL Server Management Studio


### Enable SQL and Windows authentication

Right-click on property in the left-hand menu. Then, in the “security” section. Tick “SQL Server and Windows authentication mode”, then click OK.

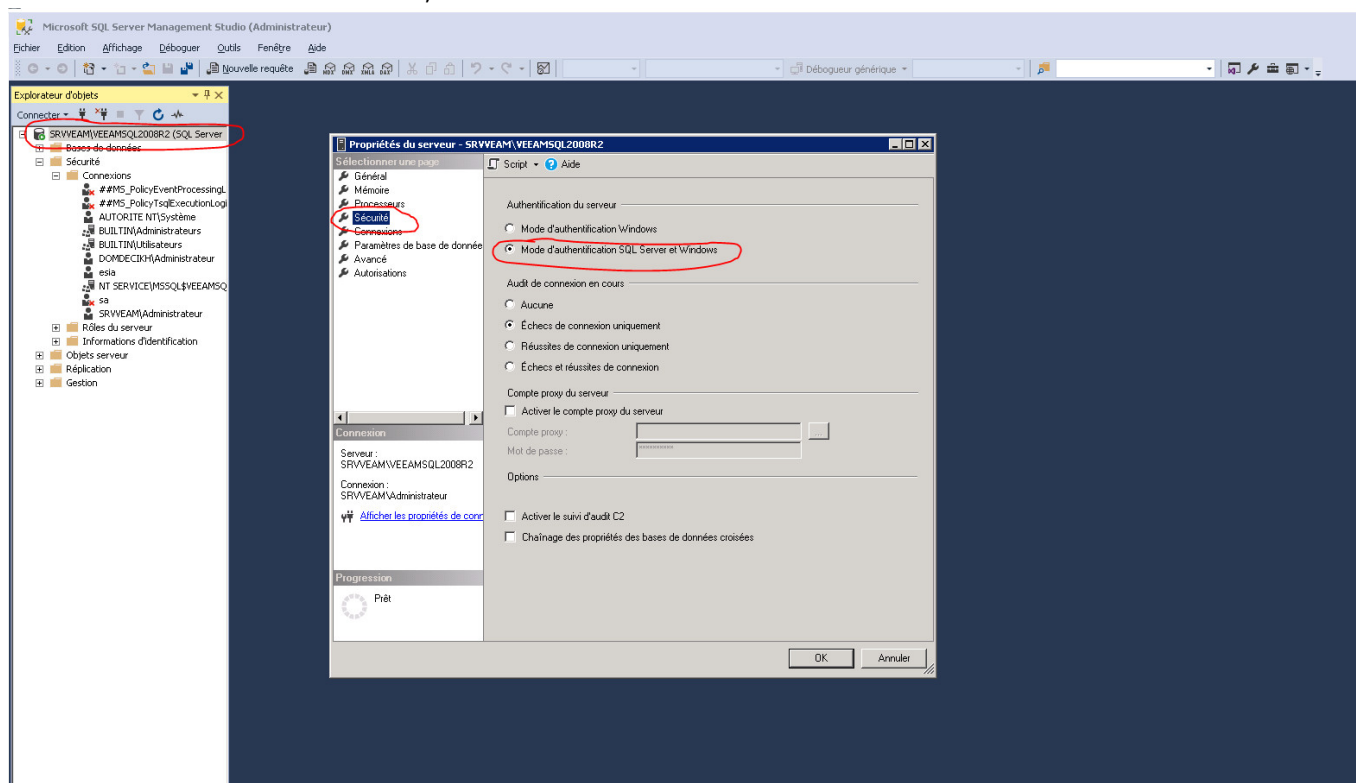

### Create a user for Esia


Right-click on “Security” in the left-hand menu. Go to “New” and then “User”. Now fill in the user name + password. It is advisable to uncheck “Apply password expiry”. Finally, select VeeamBackup as the default database.

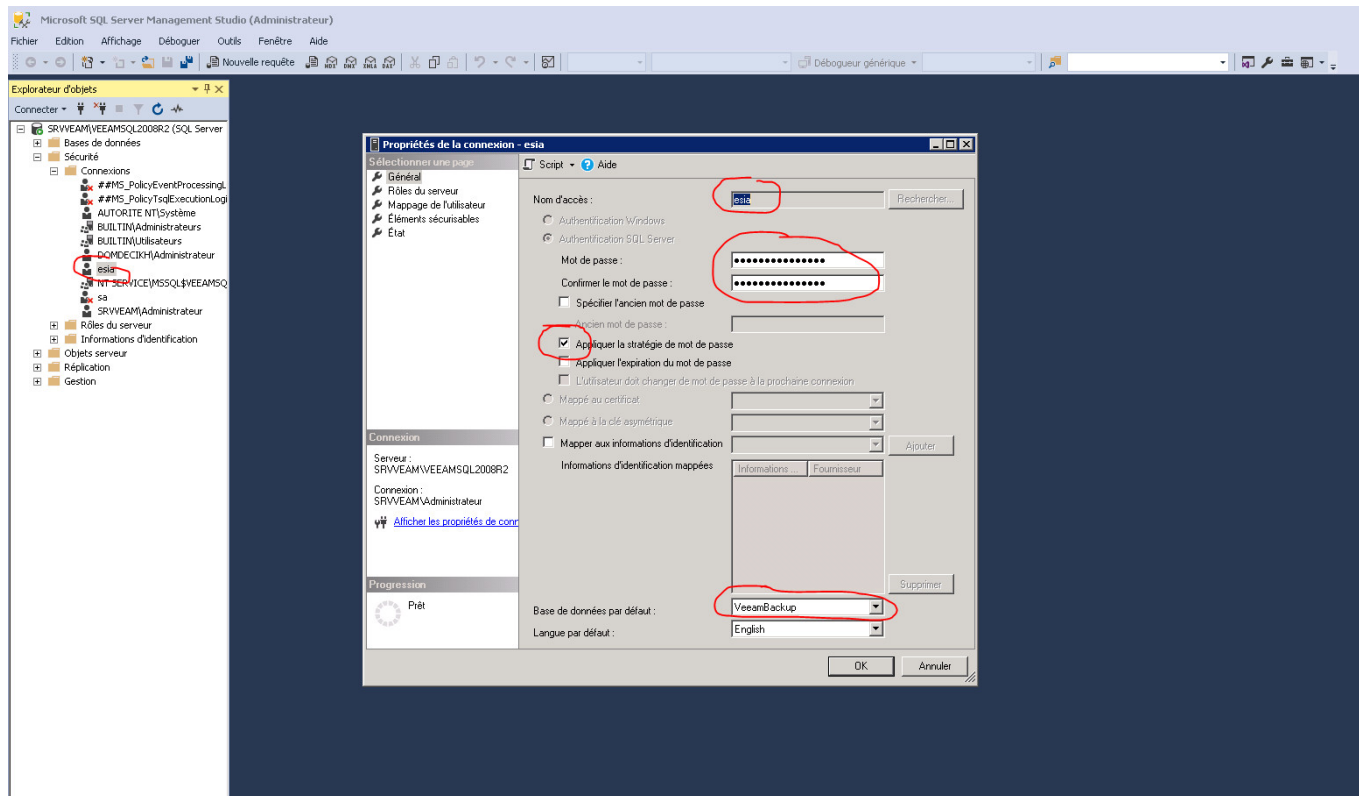

## Assign read-only rights to this user

In the user properties, go to “User mapping” and check that VeeamBackup is ticked. And select the following rights:

- db\_datareader
- public

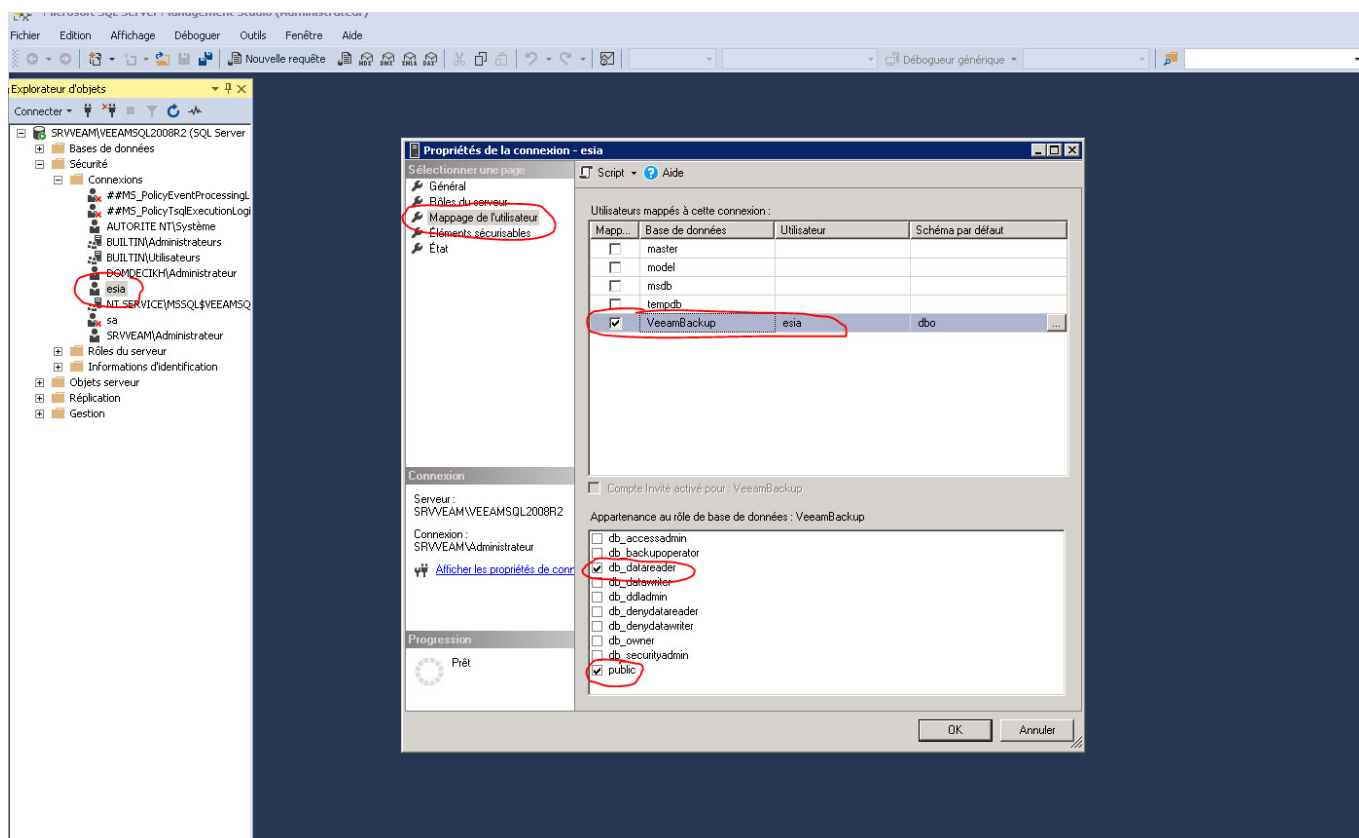


# Sql Server Configuration Manager

Now go to the SQL Server Configuration Manager.

In the tree on the right, scroll down to “SQL Server Network Configuration” and click on “Protocols for VEEAMSQLXXXX”.

Then right-click on TCP/IP and open the properties. In the “IP addresses” tab, go to the bottom of the drop-down list. You can indicate or check that the TCP Port value is set to 1433.

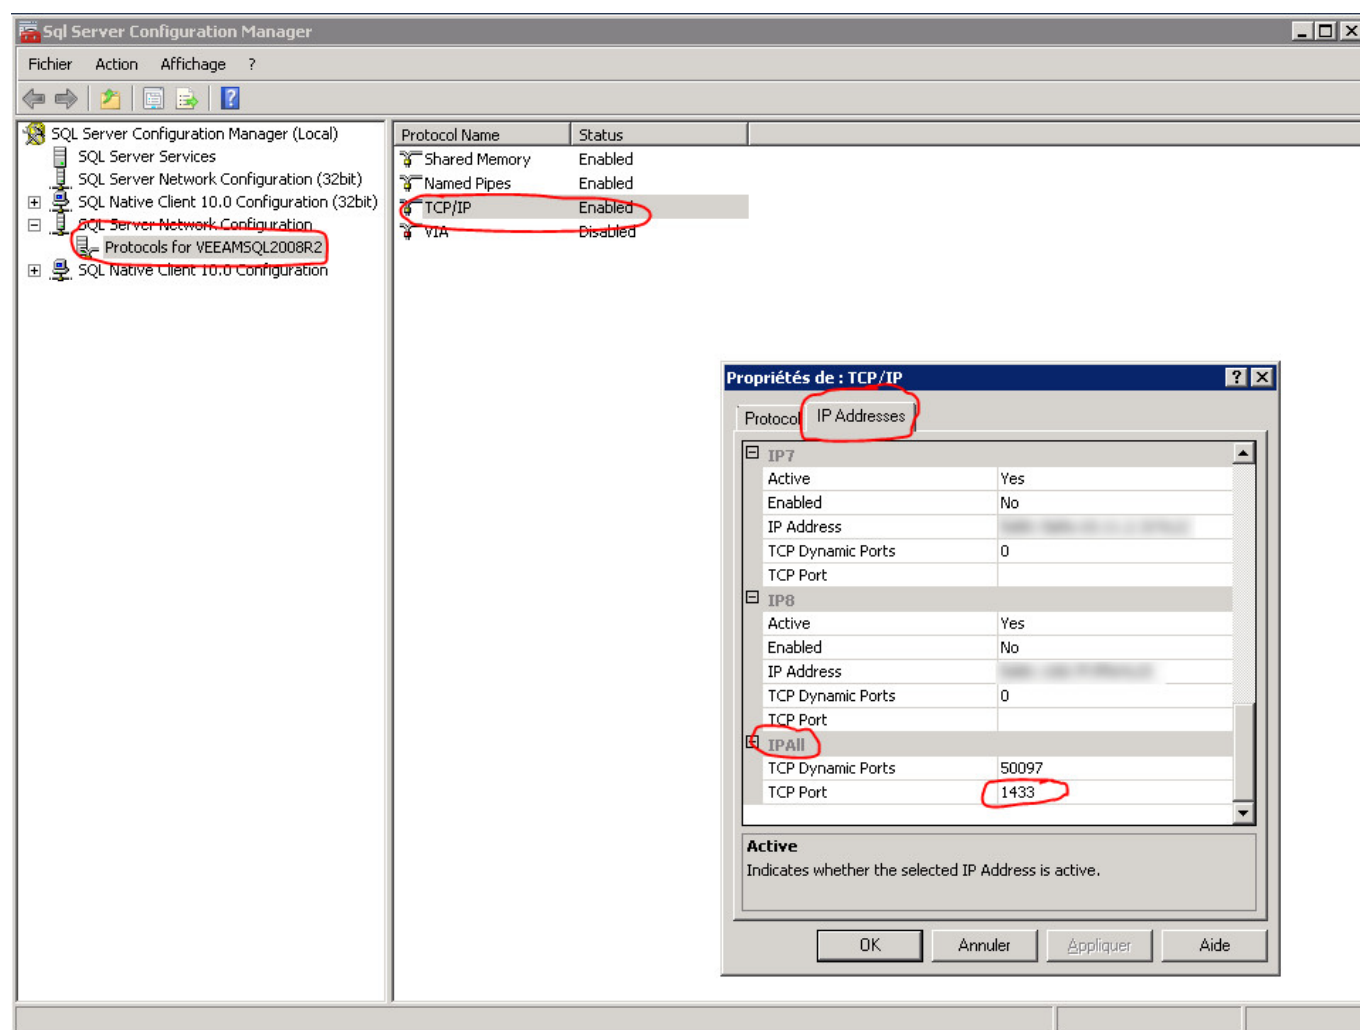

If necessary, you will need to restart the SQL service.

## Configuration on Esia

### Esia Galaxy only

You need to activate the Esia backup webplugin. To do this, connect to the Esia server using ssh (Putty) and enter the following command as root: `apt-get update && apt-get install esia-webp-backup`

### Add a backup node.

In your Esia interface, go to administration (the toothed road on the left) and then click on the

“manually add node” button in the top right-hand corner. As shown in the image below.

The screenshot shows the Veeam Backup & Replication console interface. On the left sidebar, under 'GROUPE DE NOEUDS', there is a red box labeled '1' around the 'Ajouter un nœud' button. In the main table area, under the 'Nœuds' tab, there is a red box labeled '2' around the 'Ajouter un nœud' button in the top right corner of the table header.

NOM DU NOEUD	GROUPE	TYPE DE NOEUD	ADRESSE IP	DESCRIPTION	NOMBRE DE SERVICES	ACTION
Accès Internet	Applications	none	10.8.0.11		3	
app-anscan	Applications	application	0.0.0.0		1	
BCK-Bareos-director	Backup	backup server	10.7.0.7		6	
BCK-Eurobackup-server	Backup	backup server	10.7.0.9		3	
BCK-Mail Analyzer	Backup	none	0.0.0.0	Analyse d'une boîte mails recevant le résultat de backups.	1	
BCK-Veeam-server	Backup	backup server	10.7.0.8		5	
Capteur de température	Salle serveur	none	10.5.0.250	RACK-LOCAL5	6	
cl-1-wan-siteB	Pare-feux	none	8.8.8.8		1	
cl-erp	Applications	application	0.0.0.0		1	
cll-maintenance	Maintenance	none	10.13.0.150		1	
cll-réseau	Applications	application	0.0.0.0		1	

The following page appears:

The screenshot shows the 'AJOUTER UN NOEUD' form. The 'Type de nœud' dropdown is highlighted with a red box and set to 'Backup server'. The 'Groupe' field is empty, and the 'Version SNMP' is set to 'none'.

**INFORMATIONS GÉNÉRALES**

Nom du nœud: veeam

Type de nœud: Backup server

Adresse IP: 10.12.0.3

Connecté derrière la Unity: none

Description:

**INFORMATIONS SNMP**

Version SNMP: none

Ajouter

Specify the name, IP address and group in which the node should appear. **The most important thing is to indicate the type of node, such as “backup server”.** A configuration page will appear, asking you to configure the driver. Select the “veeam - db” driver and a menu will appear below it. Click on “SQL Authentication” and enter your database connection parameters.

AJOUTER UN NOEUD

CONFIGURATION DU DRIVER

Driver

veeam - db

Durée de rétention (En jours)

15

Authentication SQL

Authentication Windows

Port

1433

Base de données

veeamdb

Utilisateur

esia

Mot de passe

\*\*\*\*\*

Annuler

Test

Sauver

Once you have filled in the details, click on 'Test' to validate your user parameters. If the test is OK, you can save it.

You now need to wait 15 to 30 minutes for synchronisation to take place. Once synchronisation is complete, you can start monitoring your backups. You can continue the tutorial by following this link: [Activate back-up monitoring](#)

From:

<https://wiki.esia-sa.com/> - **Esia Wiki**

Permanent link:

[https://wiki.esia-sa.com/en/advanced/sql\\_veeam](https://wiki.esia-sa.com/en/advanced/sql_veeam)

Last update: **2025/11/21 12:51**

