



SNMP activation on a Ruckus access point

Via a Virtual Smart Zone controller

Once you are logged in as administrator, click on the “Services” menu, then under “Others”, enter the AP SNMP Agent submenu.

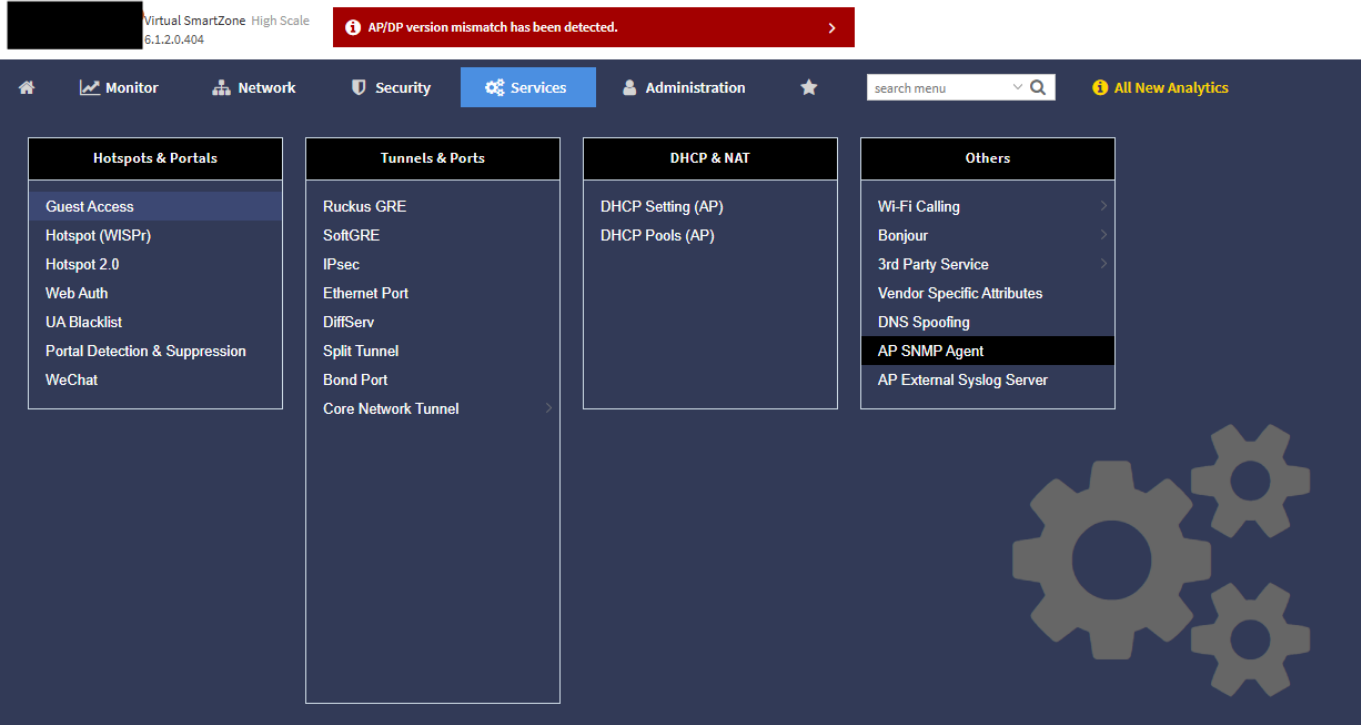

You will then be taken to this page:

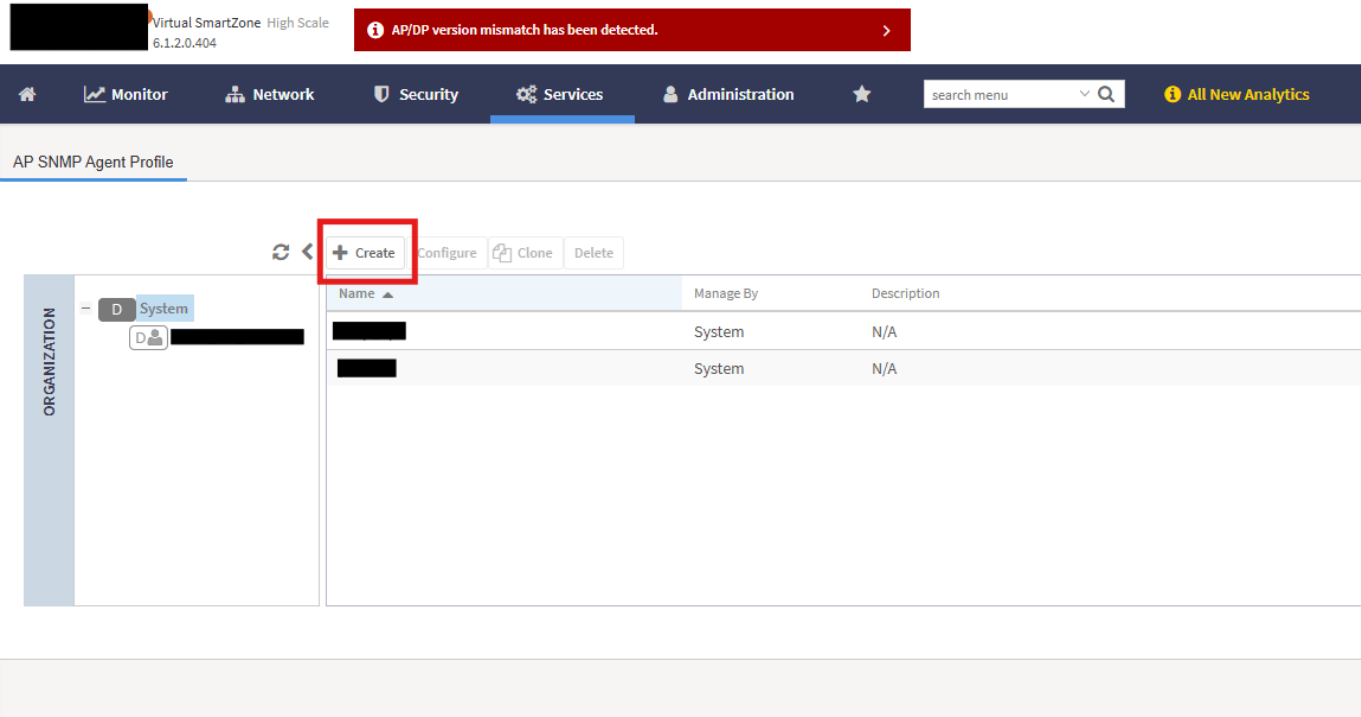

Click on “Create” to set up your community, using SNMPV2 or SNMPV3.

Create AP SNMP Agent Profile

General Options

Name:

Description:

SNMP Agent Options

SNMPv2 Agent

Create

Configure

Delete

Community	Privilege	Notification Target
-----------	-----------	---------------------

SNMPv3 Agent

Create

Configure

Delete

User	Authentication	Auth Pass Phrase	Privacy	Privacy Phrase	Privilege	Notification Target
------	----------------	------------------	---------	----------------	-----------	---------------------

OK

Cancel

Then click on OK

You can now apply the “default_snmp_ap_ruckus” pattern, which will allow you to monitor

- PING
- CPU
- RAM
- Number of clients connected
- Temperature if provided by the access point

From:

<https://wiki.esia-sa.com/> - **Esia Wiki**

Permanent link:

https://wiki.esia-sa.com/en/snmp/snmp_ruckus

Last update:

2025/05/12 12:48

