


Proxmox Backup

This tutorial enables you to activate the monitoring of Proxmox backups on your Esia.

Create a user

First, go to your web interface to create a user with read-only rights.

1. Go to the **“Access control”** page (you are already in the user section)
2. then on **“Add”**

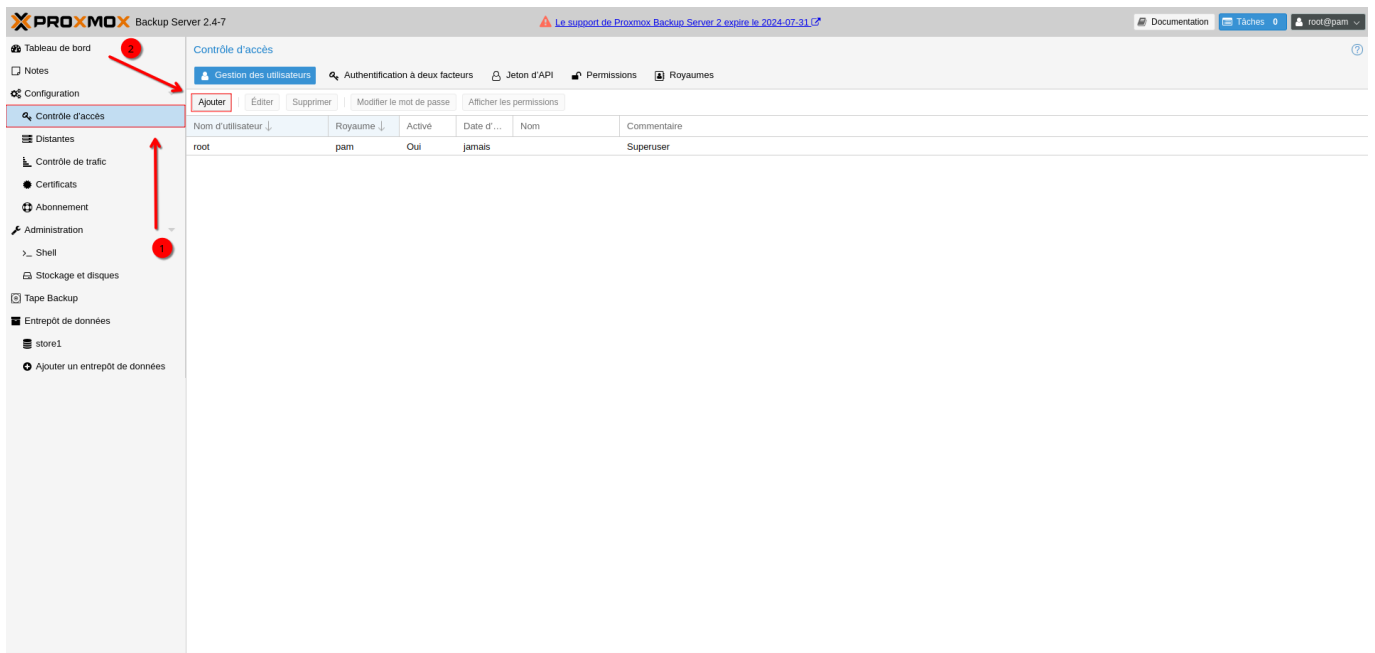

- Provide a username and password.
- Leave the kingdom as the default.

Ajouter: Utilisateur

Nom d'utilisateur: Prénom:

Royaume: Nom:

Mot de passe: Courriel:

Confirmer le mot de passe:

Date d'expiration:


Activé:

Commentaire:

[? Aide](#)

Create the token

1. Click on **API Token**
2. then on **add**

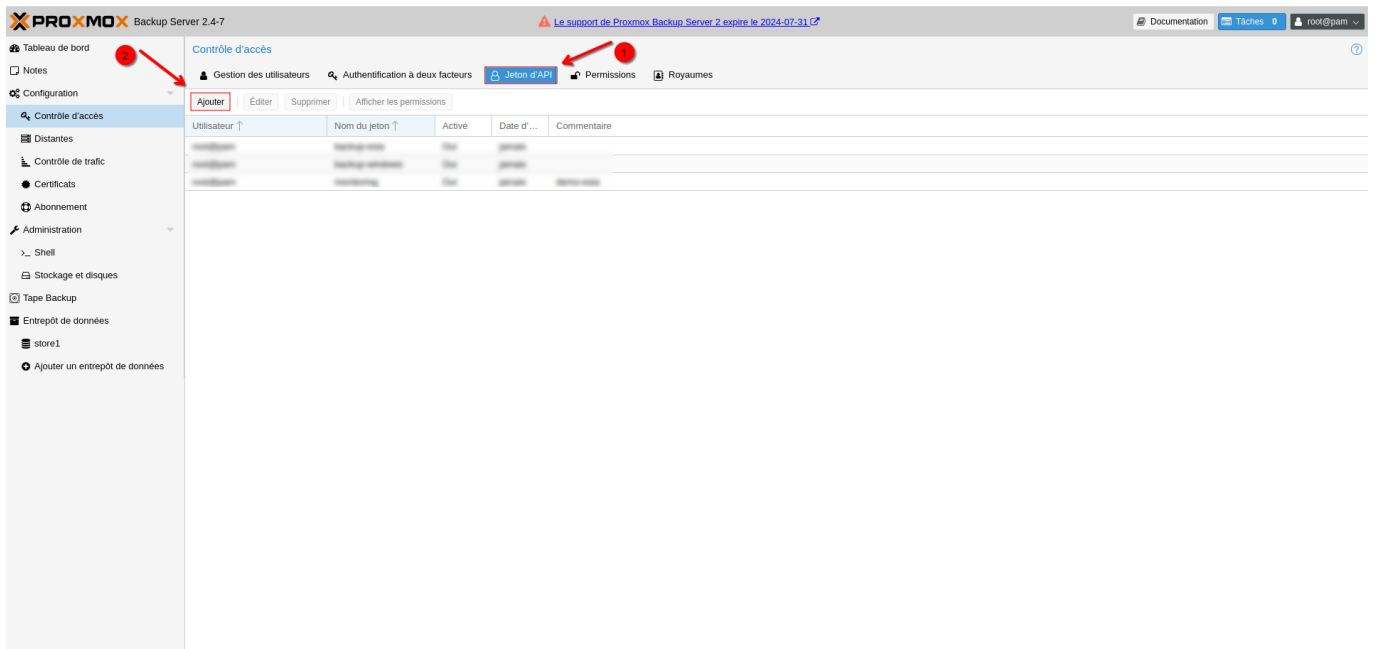

- Select the user you have created.
- Give a name to your **token**

Ajouter: Jeton d'API

Utilisateur: Date d'expiration:

Nom du jeton: Activé:

Commentaire:

The token and its identifier are created.

⚠ Save the token so that it cannot be retrieved from proxmox ⚠

Code du jeton

Identifiant du jeton:


Secret:

Veillez enregistrer le code du jeton d'API, vous ne pourrez plus jamais le visualiser après


Give permissions

Once you have created the user and the token, you now need to give them permissions

1. Click on **Permissions**
2. and then **Add**

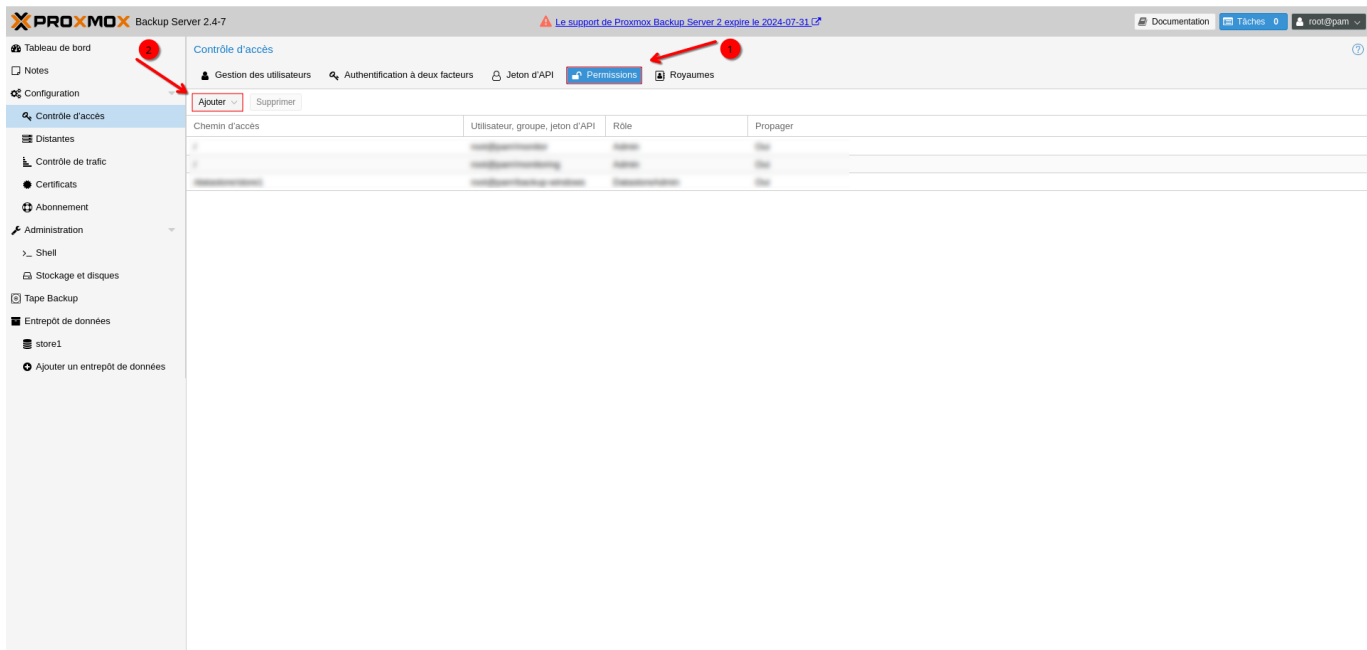

User permissions

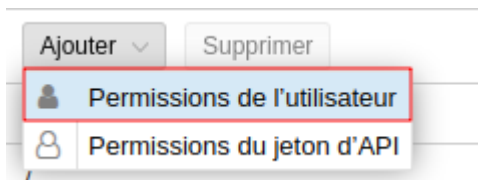

- Select the backup folder
- Select the user
- Give him the “**DatastoreAudit**”

Ajouter: Permissions de l'utilisateur

Chemin d'accès: /datastore/store1


Utilisateur: esia@pbs

Rôle: DatastoreAudit

Propager:

Aide Ajouter

API token permissions

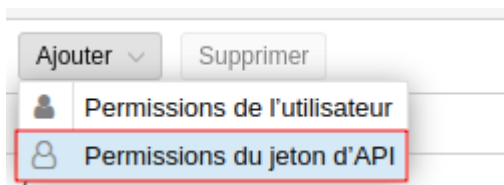

- Select the backup folder
- Select the token
- Give it " rights**DatastoreAudit**"

Ajouter: Permissions du jeton d'API

Chemin d'accès: /datastore/store1

Jeton d'API: esia@pbs!esia-view

Rôle: DatastoreAudit

Propager:

Aide Ajouter

ESIA link

- Add the node and its parameters

MODIFICATION DU NOEUD

proxmox-backup

MODIFICATION DU NOEUD PARAMÈTRES AVANCÉS SERVICES ALERTES PATTERN DE SERVICES

INFORMATIONS GÉNÉRALES

Nom du noeud: proxmox-backup

Type de noeud: Backup server

Groupe: Backup

Adresse IP: [redacted]

Connecté derrière la Unity: none

Description: [empty text area]

INFORMATIONS SNMP

Version SNMP: none

Modifier

- Select the proxmox driver - api

AJOUTER UN NOEUD

CONFIGURATION DU DRIVER

Driver	Durée de rétention (En jours)
<input type="text" value="Select an Option"/>	<input type="text" value="15"/>
<ul style="list-style-type: none">bareos - apiveeam - dbeurobackup - apiappassure - snmpproxmox - apiveeam365 - api	

- Fill in the form with the relevant data

MODIFICATION DU NOEUD

CONFIGURATION DU DRIVER

Driver	Durée de rétention (En jours)
<input type="text" value="proxmox - api"/>	<input type="text" value="15"/>
Url	Nom du token
<input type="text" value="https://192.168.1.100:8006"/>	<input type="text" value="esia-view"/>
Utilisateur	Valeur du token
<input type="text" value="esia@pbs"/>	<input type="text" value="*****"/>

From:
<https://wiki.esia-sa.com/> - **Esia Wiki**

Permanent link:
https://wiki.esia-sa.com/en/advanced/proxmox_backup

Last update: **2025/04/28 15:11**

