


Activation SNMP sur un Raritan

Active SNMP

Ouvrez votre navigateur et dans la barre d'adresse, rentrez l'adresse IP de votre PDU et appuyez sur **“enter”**. Une fois connecté, vous devriez voir ceci :

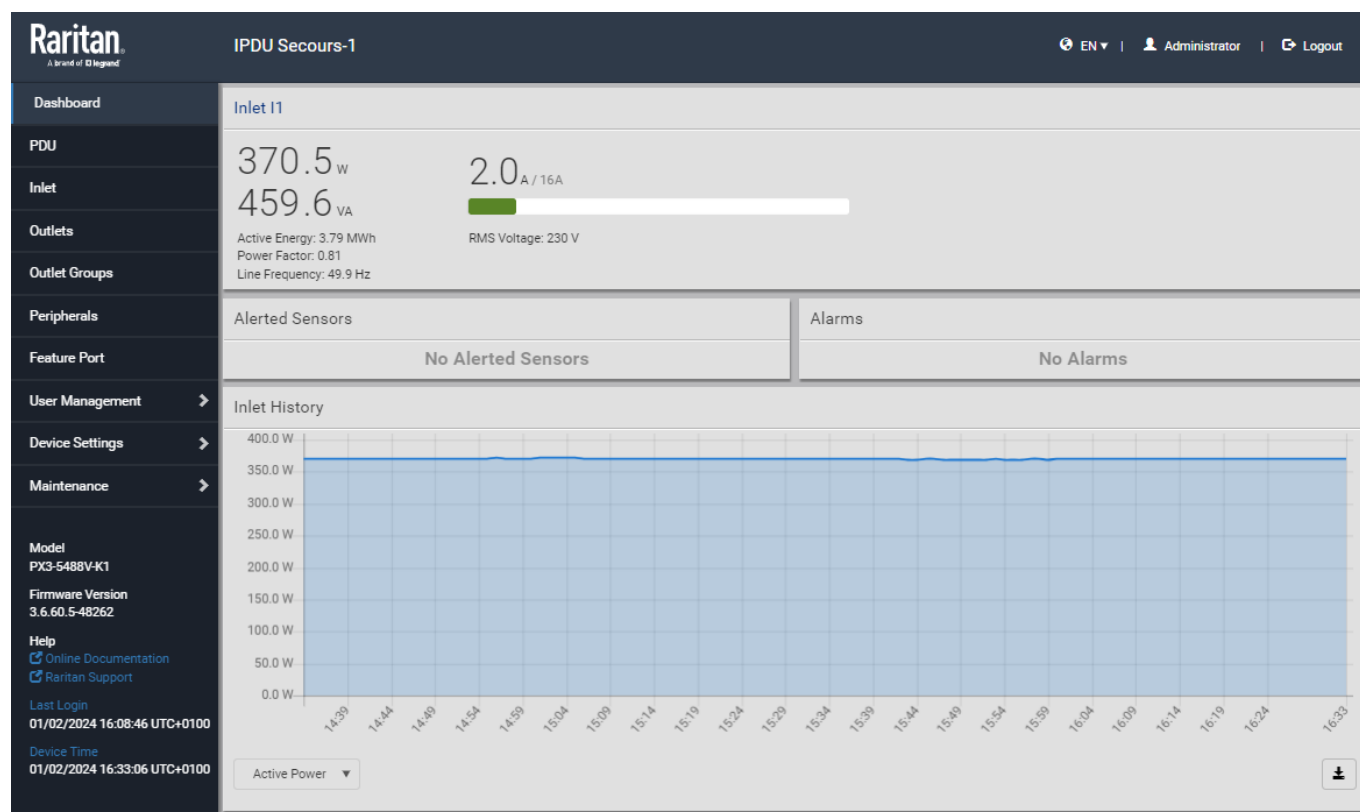

Ensuite, cliquez sur **“Device Settings”** dans le menu principal puis sur **“Network Services”** et enfin sur **“SNMP”**, la fenêtre de configuration apparaît.

Dans l'onglet SNMP Agent, cochez la case **“Enable SNMP v1 / v2c”** et modifiez si vous le souhaitez la communauté SNMP (Read community string). Cliquez sur **“Save”** pour valider les changements :

Raritan

A brand of Eldec

IPDU Secours-1

EN | Administrator | Logout

Device Settings

Network Services

HTTP

SNMP

SMTP Server

SSH

Telnet

Modbus

Service Advertising

Model
PX3-5488V-K1

Firmware Version
3.6.60.5-48262

Help
Online Documentation
Raritan Support

Last Login
01/02/2024 16:08:46 UTC+0100

Device Time
01/02/2024 16:36:14 UTC+0100

SNMP

SNMP Agent

Enable SNMP v1 / v2c

☐

Read community string

public

Write community string

Enable SNMP v3

☐

MIB-II System Group

sysContact

sysName

sysLocation

SNMP Notifications

Enable SNMP notifications

☐

Notification type

SNMPv2c trap

Timeout

3

s

Number of retries

5

| # | Host | Port | Community |
|---|------|------|-----------|
| 1 | | 162 | |
| 2 | | 162 | |
| 3 | | 162 | |

Download MIBs

Save

Branchement en série des PDU

Afin de brancher les PDU en série via un câble USB pour éviter de brancher un câble réseau sur chaque PDU, cliquez sur **“Device Settings”** dans le menu principal puis sur **“Network ”**, la fenêtre de configuration apparaît.

Dans l’onglet **“Common Network Settings”**, choisissez Master pour l’option **“Port forwarding role”** et choisissez USB pour l’option **“Downstream interface”** :

Raritan

A brand of iLegend

IPDU Secours-1

EN | Administrator | Logout

Home

Device Settings

Network

Network Services

Security

Date/Time

Event Rules

Data Logging

Data Push

Server Reachability

Front Panel

Serial Port

Lua Scripts

Miscellaneous

Model
PX3-5488V-K1

Firmware Version
3.6.60.5-48262

Help
[Online Documentation](#)
[Raritan Support](#)

Last Login
01/02/2024 16:08:46 UTC+0100

Device Time
01/02/2024 16:41:21 UTC+0100

Network

Common Network Settings

Cascading mode

Port Forwarding

Port forwarding role

Master

Downstream interface

USB

DNS resolver preference

IPv4 address

DNS suffixes (optional)

First DNS server

Second DNS server

Third DNS server

IPv4 routes

Default gateway

192.168.160.1

#

Destination

Next Hop / Interface

no routes defined

Add Route

IPv6 routes

Default gateway

#

Destination

Next Hop / Interface

no routes defined

Add Route

Répétez la même opération pour les seconds PDU et choisissez Slave pour l’option “**Port forwarding role**” dans ce cas-ci :

Raritan

A brand of iLegend

IPDU N/Secours-1

EN | intervention | Logout

Home

Device Settings

Network

Network Services

Security

Date/Time

Event Rules

Data Logging

Data Push

Server Reachability

Front Panel

Serial Port

Lua Scripts

Network

Common Network Settings

Cascading mode

Port Forwarding

Port forwarding role

Slave

DNS resolver preference

IPv4 address

DNS suffixes (optional)

First DNS server

Second DNS server

Third DNS server

ETHERNET

WIRELESS

Save

From:

<https://wiki.esia-sa.com/> - **Esia Wiki**

Permanent link:

https://wiki.esia-sa.com/snmp/snmp_raritan

Last update: **2024/04/22 13:18**

