


# Configurer SNMP sur les caméras Axis

## Gamme M1125

Une fois connecté sur la caméra et cliquez sur "Setup" en haut à gauche

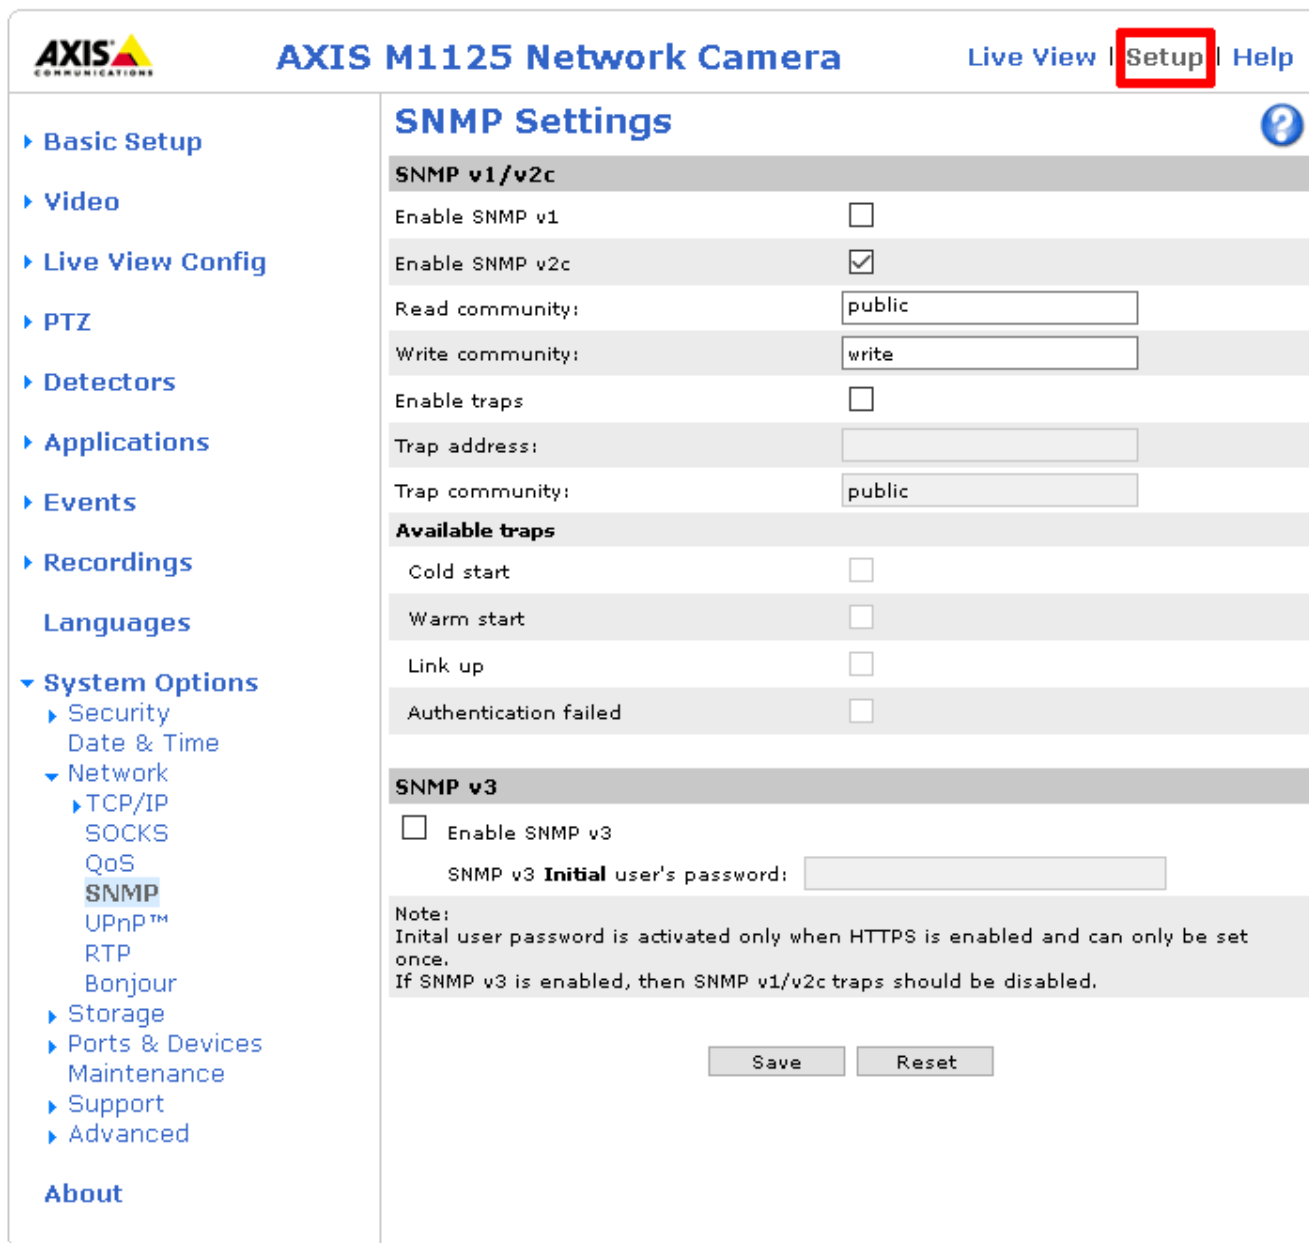

Ensuite, déroulez le menu "System Option" à gauche, puis "Network" et cliquez sur SNMP.

The screenshot shows the web interface for an AXIS M1125 Network Camera. The top navigation bar includes the AXIS logo, the camera model name, and links for 'Live View', 'Setup', and 'Help'. A left sidebar menu lists various configuration categories, with 'System Options' and 'SNMP' highlighted in red boxes. The main content area is titled 'SNMP Settings' and contains the following sections:

- SNMP v1/v2c**:
  - Enable SNMP v1:
  - Enable SNMP v2c:
  - Read community:
  - Write community:
  - Enable traps:
  - Trap address:
  - Trap community:
- Available traps**:
  - Cold start:
  - Warm start:
  - Link up:
  - Authentication failed:
- SNMP v3**:
  - Enable SNMP v3:
  - SNMP v3 Initial user's password:


A note at the bottom of the settings area states: "Note: Initial user password is activated only when HTTPS is enabled and can only be set once. If SNMP v3 is enabled, then SNMP v1/v2c traps should be disabled." At the bottom of the page, there are 'Save' and 'Reset' buttons.

Cochez "Enable SNMP v2c" et renseignez la communauté SNMP en lecture (ici: public).


Cliquez sur "Save" en bas de l'écran

## Gamme P1364

Une fois connecté sur la caméra et cliquez sur "Settings" en bas à gauche.

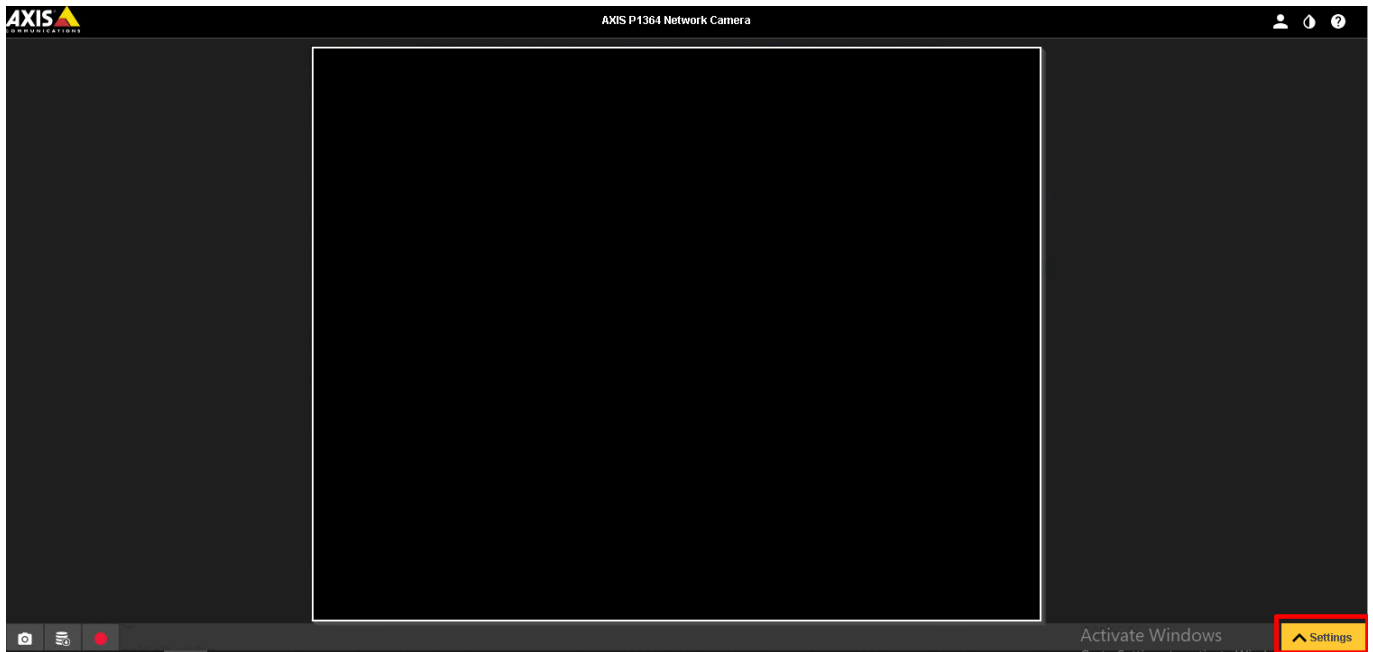

Aller dans l'onglet "System" puis cliquez sur "SNMP" pour ouvrir le menu de configuration.

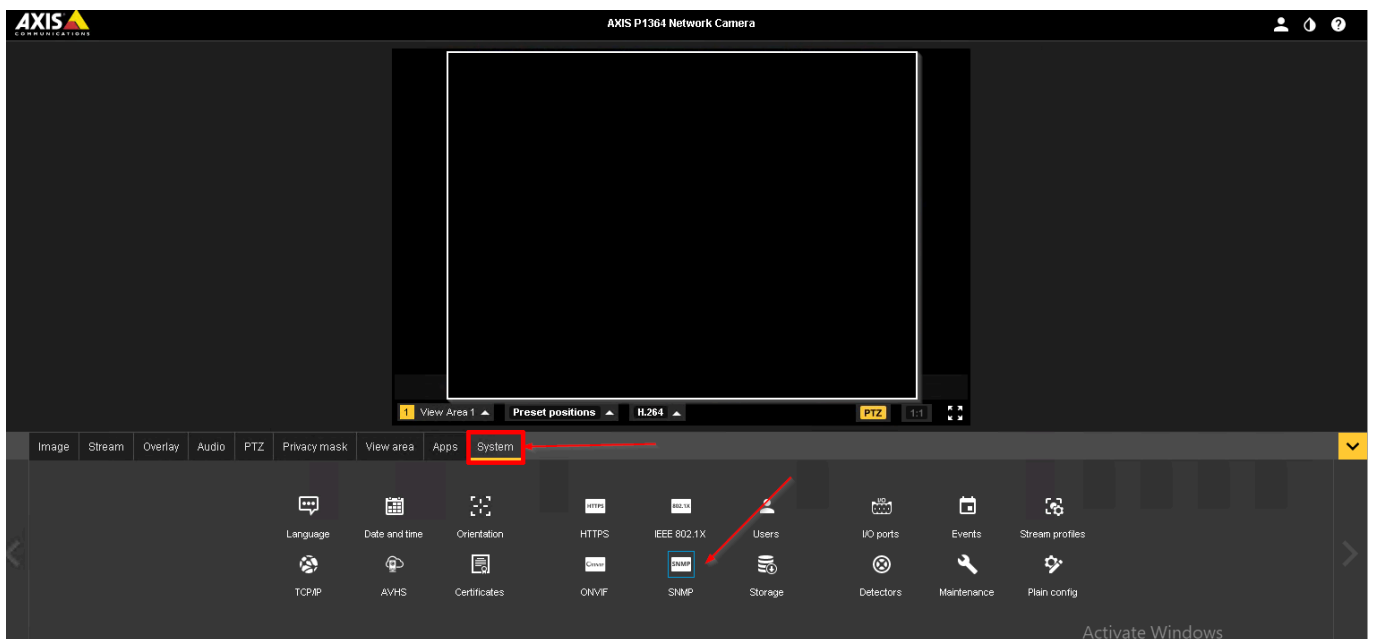

Dans le menu de configuration, cochez "Enable SNMP v2c" et renseignez la communauté SNMP en lecture (ici: public).

## SNMP Settings

### SNMP

#### SNMP v1/v2c

Enable SNMP v1

Enable SNMP v2c

Read community:

Write community:

Enable traps

Trap address:

Trap community:

#### Available traps

Cold start

Warm start

Link up

Authentication failed

#### SNMP v3

Enable SNMP v3

SNMP v3 **Initial** user's password:

Note:  
Initial user password is activated only when HTTPS is enabled and can only be set once.  
If SNMP v3 is enabled, then SNMP v1/v2c traps should be disabled.

Cliquez sur "Save" pour appliquer la configuration.

From:  
<https://wiki.esia-sa.com/> - **Esia Wiki**

Permanent link:  
[https://wiki.esia-sa.com/snmp/snmp\\_axis\\_camera](https://wiki.esia-sa.com/snmp/snmp_axis_camera)

Last update: **2023/02/10 10:31**

